




# TADANO

## TL - 250E

(25 Ton Capacity)

### TRUCK MOUNTED CRANE

#### DIMENSIONS

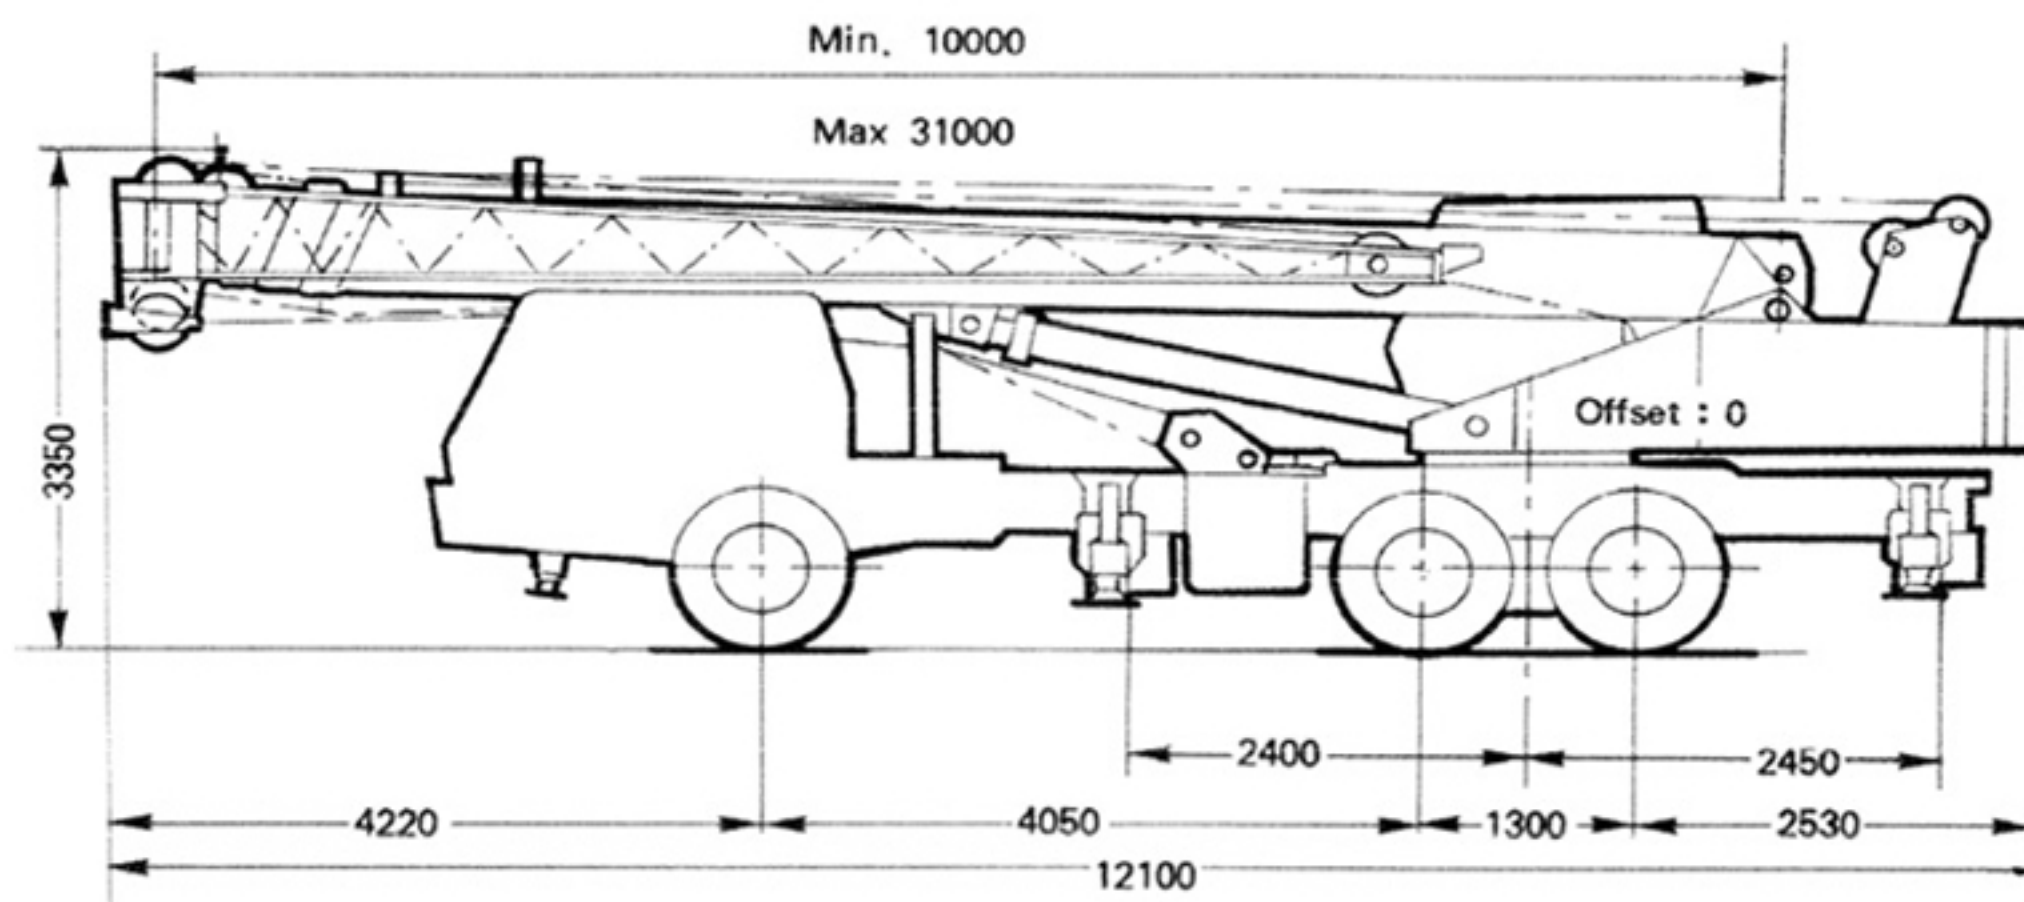

# TL-250E

CARRIER: K203LAE

## GENERAL DATA

CRANE CAPACITY	25,000kg at 3.0 m
BOOM	4-section, 10.0m—31.0 m
DIMENSIONS	
Overall length	approx. 12,100 mm
Overall width	approx. 2,500 mm
Overall height	approx. 3,350 mm
WEIGHTS	
Gross vehicle weight	approx. 24,550 kg
front	approx. 6,300 kg
rear	approx. 18,250 kg
PERFORMANCE	
Max. travelling speed	computed 70 km/h
Gradeability( $\tan \theta$ )	computed 26 %

## CRANE SPECIFICATIONS

### MODEL

TL-250E

### CAPACITY

25,000kg at 3.0m

### BOOM

4-section full length power telescoping boom of box construction with 4-sheaves at boom head. 3rd boom and top boom telescope synchronically by means of a double-acting cylinder, an extension cable and a retraction cable.

Hydraulic cylinders fitted with holding valves.

Fully retracted length..... 10.0 m

Fully extended length..... 31.0 m

Extension speed..... 21.0 m in 105 s

### JIB

Single staged lattice swingaround boom extention. Dual offset (5° /30° )type. Single sheave at jib head. Stores alongside base boom section.

Length..... 8.0 m

### SINGLE TOP (AUXILIARY BOOM SHEAVE)

Single sheave. Mounted to main boom head for single line work.

### ELEVATION

By a double-acting hydraulic cylinder, fitted with holding valve.

Elevation speed..... -3° to+80° in 48 s



TOTAL RATED LOADS

SPEC. SHEET No. TL-250E-3-20101/EU-11

DIN 15019.2-75%


Unit : kg

Outriggers fully extended										
Front jack extended (360° )										
Front jack not extended (Over sides and rear)										
A B	10.0m	13.5m	17.0m	20.5m	24.0m	27.5m	31.0m	E	C D 8.0m	
									5°	30°
3.0m	25,000	17,500	14,500	9,500				80°	2,750	1,350
3.5m	20,600	17,500	14,500	9,500				75°	2,750	1,350
4.0m	18,000	17,500	14,500	9,500	7,500	6,500		70°	2,300	1,300
4.5m	16,300	15,800	14,500	9,500	7,500	6,500		65°	2,000	1,250
5.0m	14,850	14,400	13,250	9,500	7,500	6,500	6,000	60°	1,600	1,200
5.5m	13,650	13,250	12,200	9,500	7,500	6,500	6,000	55°	1,300	1,000
6.0m	12,300	12,200	11,300	9,500	7,500	6,500	6,000	50°	950	850
6.5m	11,200	11,000	10,500	9,500	7,500	6,500	6,000	45°	650	600
7.0m	10,250	10,000	9,800	8,850	7,500	6,500	6,000	40°	400	350
7.5m	9,400	9,200	9,100	8,350	7,500	6,500	6,000	35°	250	
8.0m	8,650	8,450	8,350	7,900	7,050	6,200	5,650	A : Boom length B : Working radius C : Jib length D : Jib offset E : Boom angle		
9.0m		7,200	7,100	7,000	6,350	5,600	5,050			
10.0m		6,100	6,050	6,400	5,750	5,100	4,600			
12.0m			4,150	4,500	4,700	4,300	3,900			
14.0m			3,000	3,300	3,500	3,650	3,350			
16.0m				2,450	2,650	2,800	2,850			
18.0m				1,800	2,000	2,150	2,300			
20.0m					1,500	1,650	1,800			
22.0m					1,100	1,250	1,400			
24.0m						950	1,050			
26.0m							800			
28.0m							550			
29.0m							450			


- A : Boom length
- B : Working radius
- C : Jib length
- D : Jib offset
- E : Boom angle

Outriggers fully extended							
Front jack not extended (Over front)							
A B	10.0m	13.5m	17.0m	20.5m	24.0m	27.5m	31.0m
3.0m	20,000	17,500	14,500	9,500			
3.5m	17,800	17,500	14,500	9,500			
4.0m	15,700	15,400	14,500	9,500	7,500	6,500	
4.5m	13,800	13,600	13,200	9,500	7,500	6,500	
5.0m	10,700	10,500	10,300	9,500	7,500	6,500	6,000
6.0m	7,100	6,900	6,700	7,200	7,200	6,500	6,000
7.0m	5,000	4,900	4,700	5,200	5,300	5,300	5,200
8.0m	3,800	3,700	3,500	3,900	4,100	4,100	4,050
9.0m		2,700	2,600	2,900	3,100	3,200	3,250
10.0m		2,100	2,000	2,300	2,500	2,650	2,650
12.0m			1,000	1,300	1,500	1,650	1,700
14.0m			400	700	900	1,050	1,100
16.0m					450	550	650

WORKING AREA

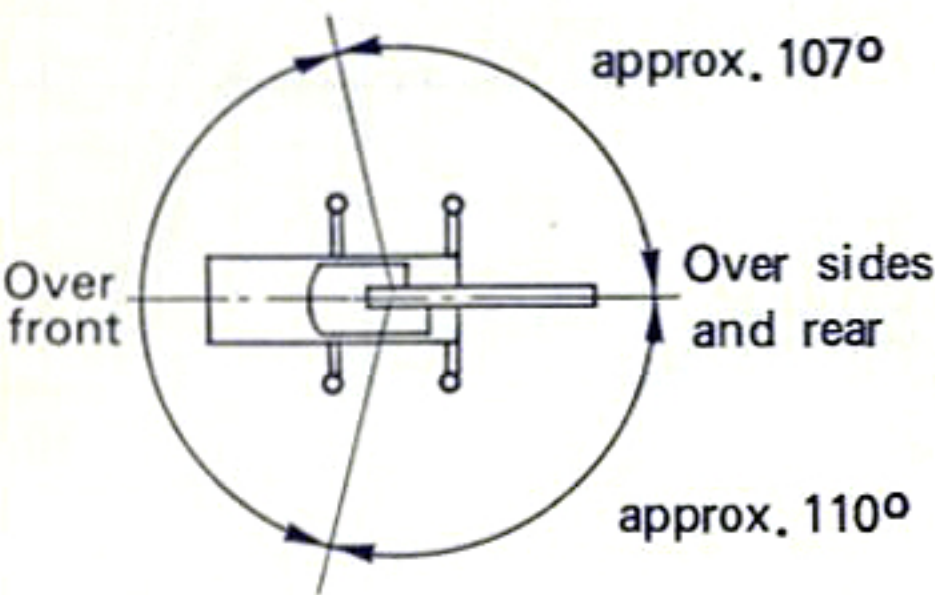



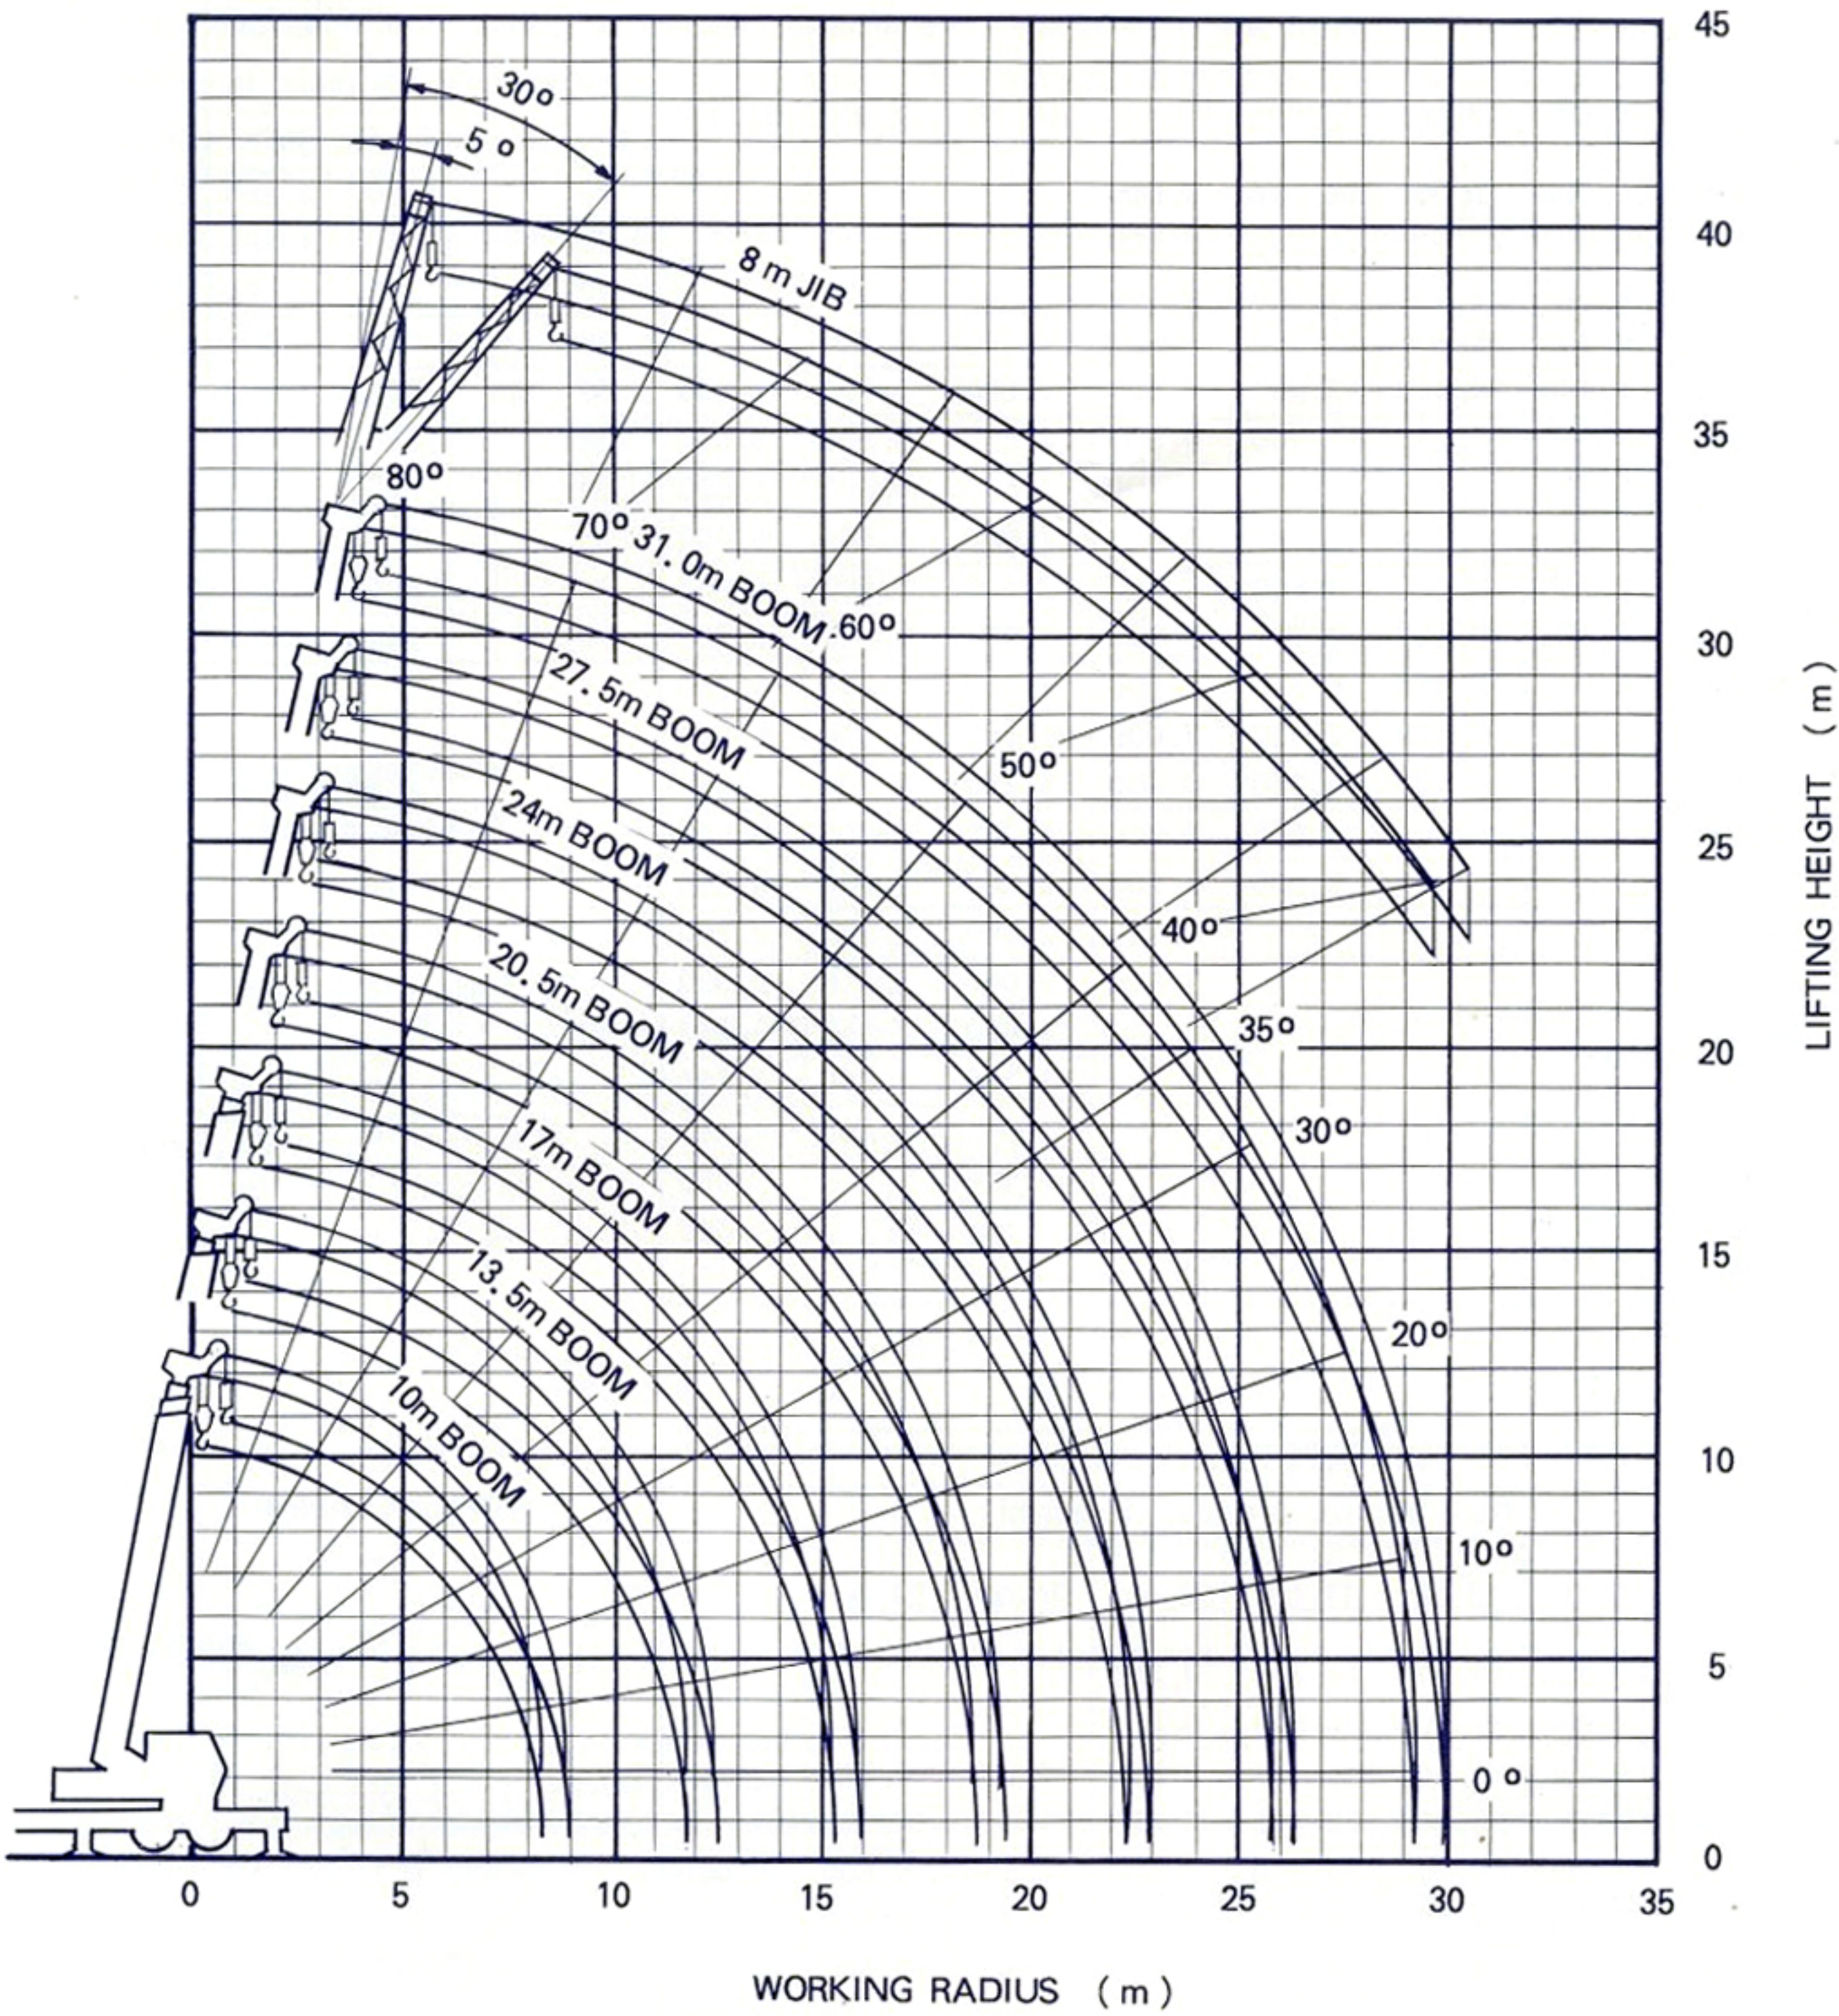

NOTE:

The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.



1. Total rated loads shown in the table are based on condition that crane is set on firm ground horizontally. Those above bold lines are based on crane strength and those below, on its stability.
2. Total rated loads below bold lines do not exceed 75 % of tipping load.
3. Each total rated load includes weight of the hooks (280 kg for 25 ton capacity, 60 kg for 3 ton capacity), and slings.
4. Without front jack extended, when the boom is within the over-front, total rated loads are different from those for the boom in the over-side and over-rear.
5. Standard number of part lines for each boom length is as shown below. Load per line should not surpass 3,150 kg for main winch and 3,000 kg for auxiliary winch.

6. For total rated load of single top, reduce load shown in following table from relevant total rated load. Total rated loads of single top should not exceed 3,000 kg.

Min. 10000

Max 31000

3350

Offset : 0

4220

4050

12100

2400

1300

2450

2530

Overall width.....2,500 mm

Tail swing radius.....3,250 mm

Tread(track) — Front.....2,040 mm

— Rear.....1,845 mm

4-12, Kamezawa 2-chome,  
Sumida-ku,  
Tokyo 130, Japan  
Telephone: Tokyo 03-621-7777  
Cable: TADANIRCO TOKYO  
Telex: J23755  
Facsimile: 03-621-7783